



## DHN-LVWES16-G2

### Rechargeable Lithium Iron Battery

The DHN-LVWES series product is a low-voltage energy storage battery designed to provide efficient and reliable energy storage solutions for households, businesses, and specific occasions. Adopting top tier brand lithium iron phosphate battery cells, with high safety, stability, energy density, and long cycle life. Built in efficient intelligent battery management system(BMS), comprehensively monitoring and controlling the battery energy storage system to ensure its safe, stable and high-performance operation.



#### Safe

- A-grade lithium iron phosphate battery with high safety performance.
- Intelligent BMS with multiple safety functions, making it safer to use.
- Fire Protection System: Standard pre-set aerosol fire extinguisher.
- IP65 Protection: Fearless of outdoor installation, strong environmental adaptability.



#### Long Life-time

- Cycle life of over 8000 cycles (70% SOH).
- High parallel balancing current to ensure battery consistency.



#### Convenient & Smart

- Bluetooth/WiFi function, support real time monitor and remote software upgrade by APP
- Support Bluetooth/WiFi inverter protocol configuration function, quickly set-up and easy to operate
- Automatic networking of battery modules, easy to maintain.
- Unique battery heating tech for low-temperature operation (optional).



#### Flexible

- Modular design, easy to expand, up to 16 parallel batteries.
- Small size, high power density.
- Wall mounted with bracket installation, floor standing with bracket or caster installation, saving installation space.
- Match with mainstream low-voltage energy storage inverters.




#### One-stop Service

- DAH Solar provide integrated system configuration services from PV to energy storage.

# TECHNICAL PARAMETER

## System Application

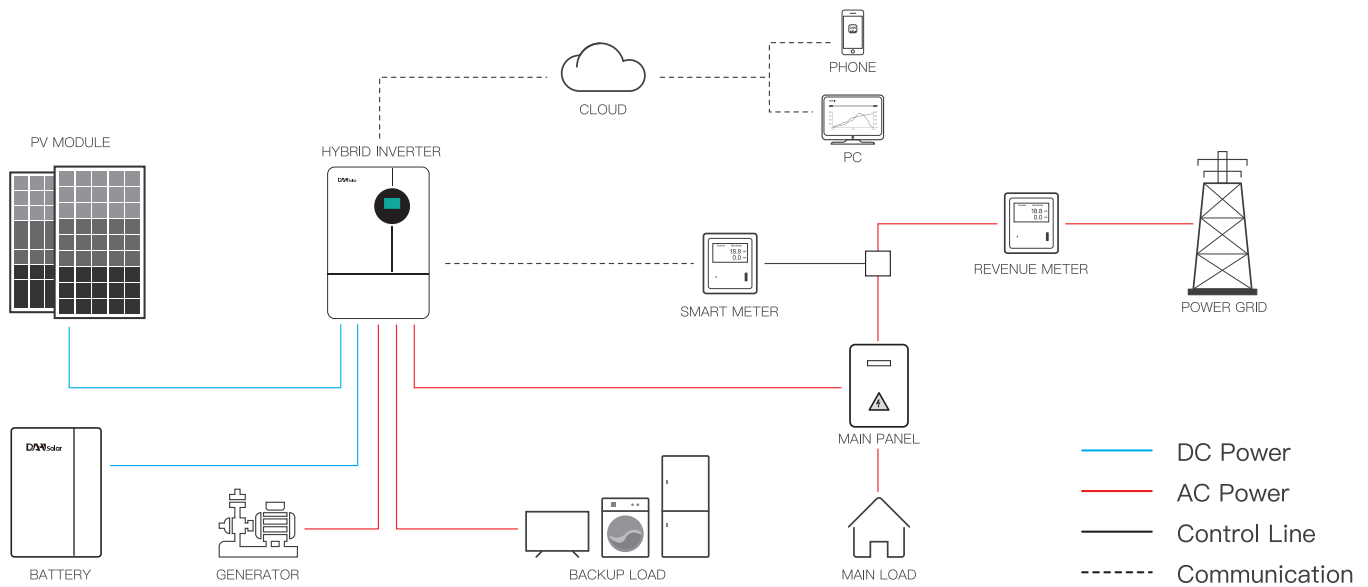

## Technical Data

Model	DHN-LVWES16-G2
-------	----------------

### Main Parameter

Battery Type	LiFePO4
Battery Rated Energy (kWh)	16.08
Battery Rated Capacity (Ah)	314
Scalability	Parallel connection of up to 16 units
Nominal Voltage (V)	51.2
Operating Voltage(V)	43.2~58.4
Charge/Discharge Current(A)-Recommend	157
Charge/Discharge Current(A)-Max	200

### Other Parameter

Recommend Depth of Discharge(%)	≤90
System Dimension (W/H/D, mm)	535*710*235
System Weight (kg)	120
Master LED Indicator	6LED(SOC:16.6%~100%),3LED (ON/OFF,RUN,ALARM)
IP Rating of Enclosure	IP65
Charge Temperature(°C)	-20~+50 (with heating function) / 0~50 (without heating function)
Discharge Temperature(°C)	-20~+55
Storage Temperature(°C)	0~35
Cycle Life	≥8000(25±2°C,0.5C/0.5C,70%EOL)
Installation	Wall-Mounted/Floor-Mounted
Fire Prevention System	Aerosol fire extinguisher
Communication Methods	CAN2.0/RS485
Warranty Period (years)	10
Certification	UN38.3/CE-IEC61000/CB-IEC62619